



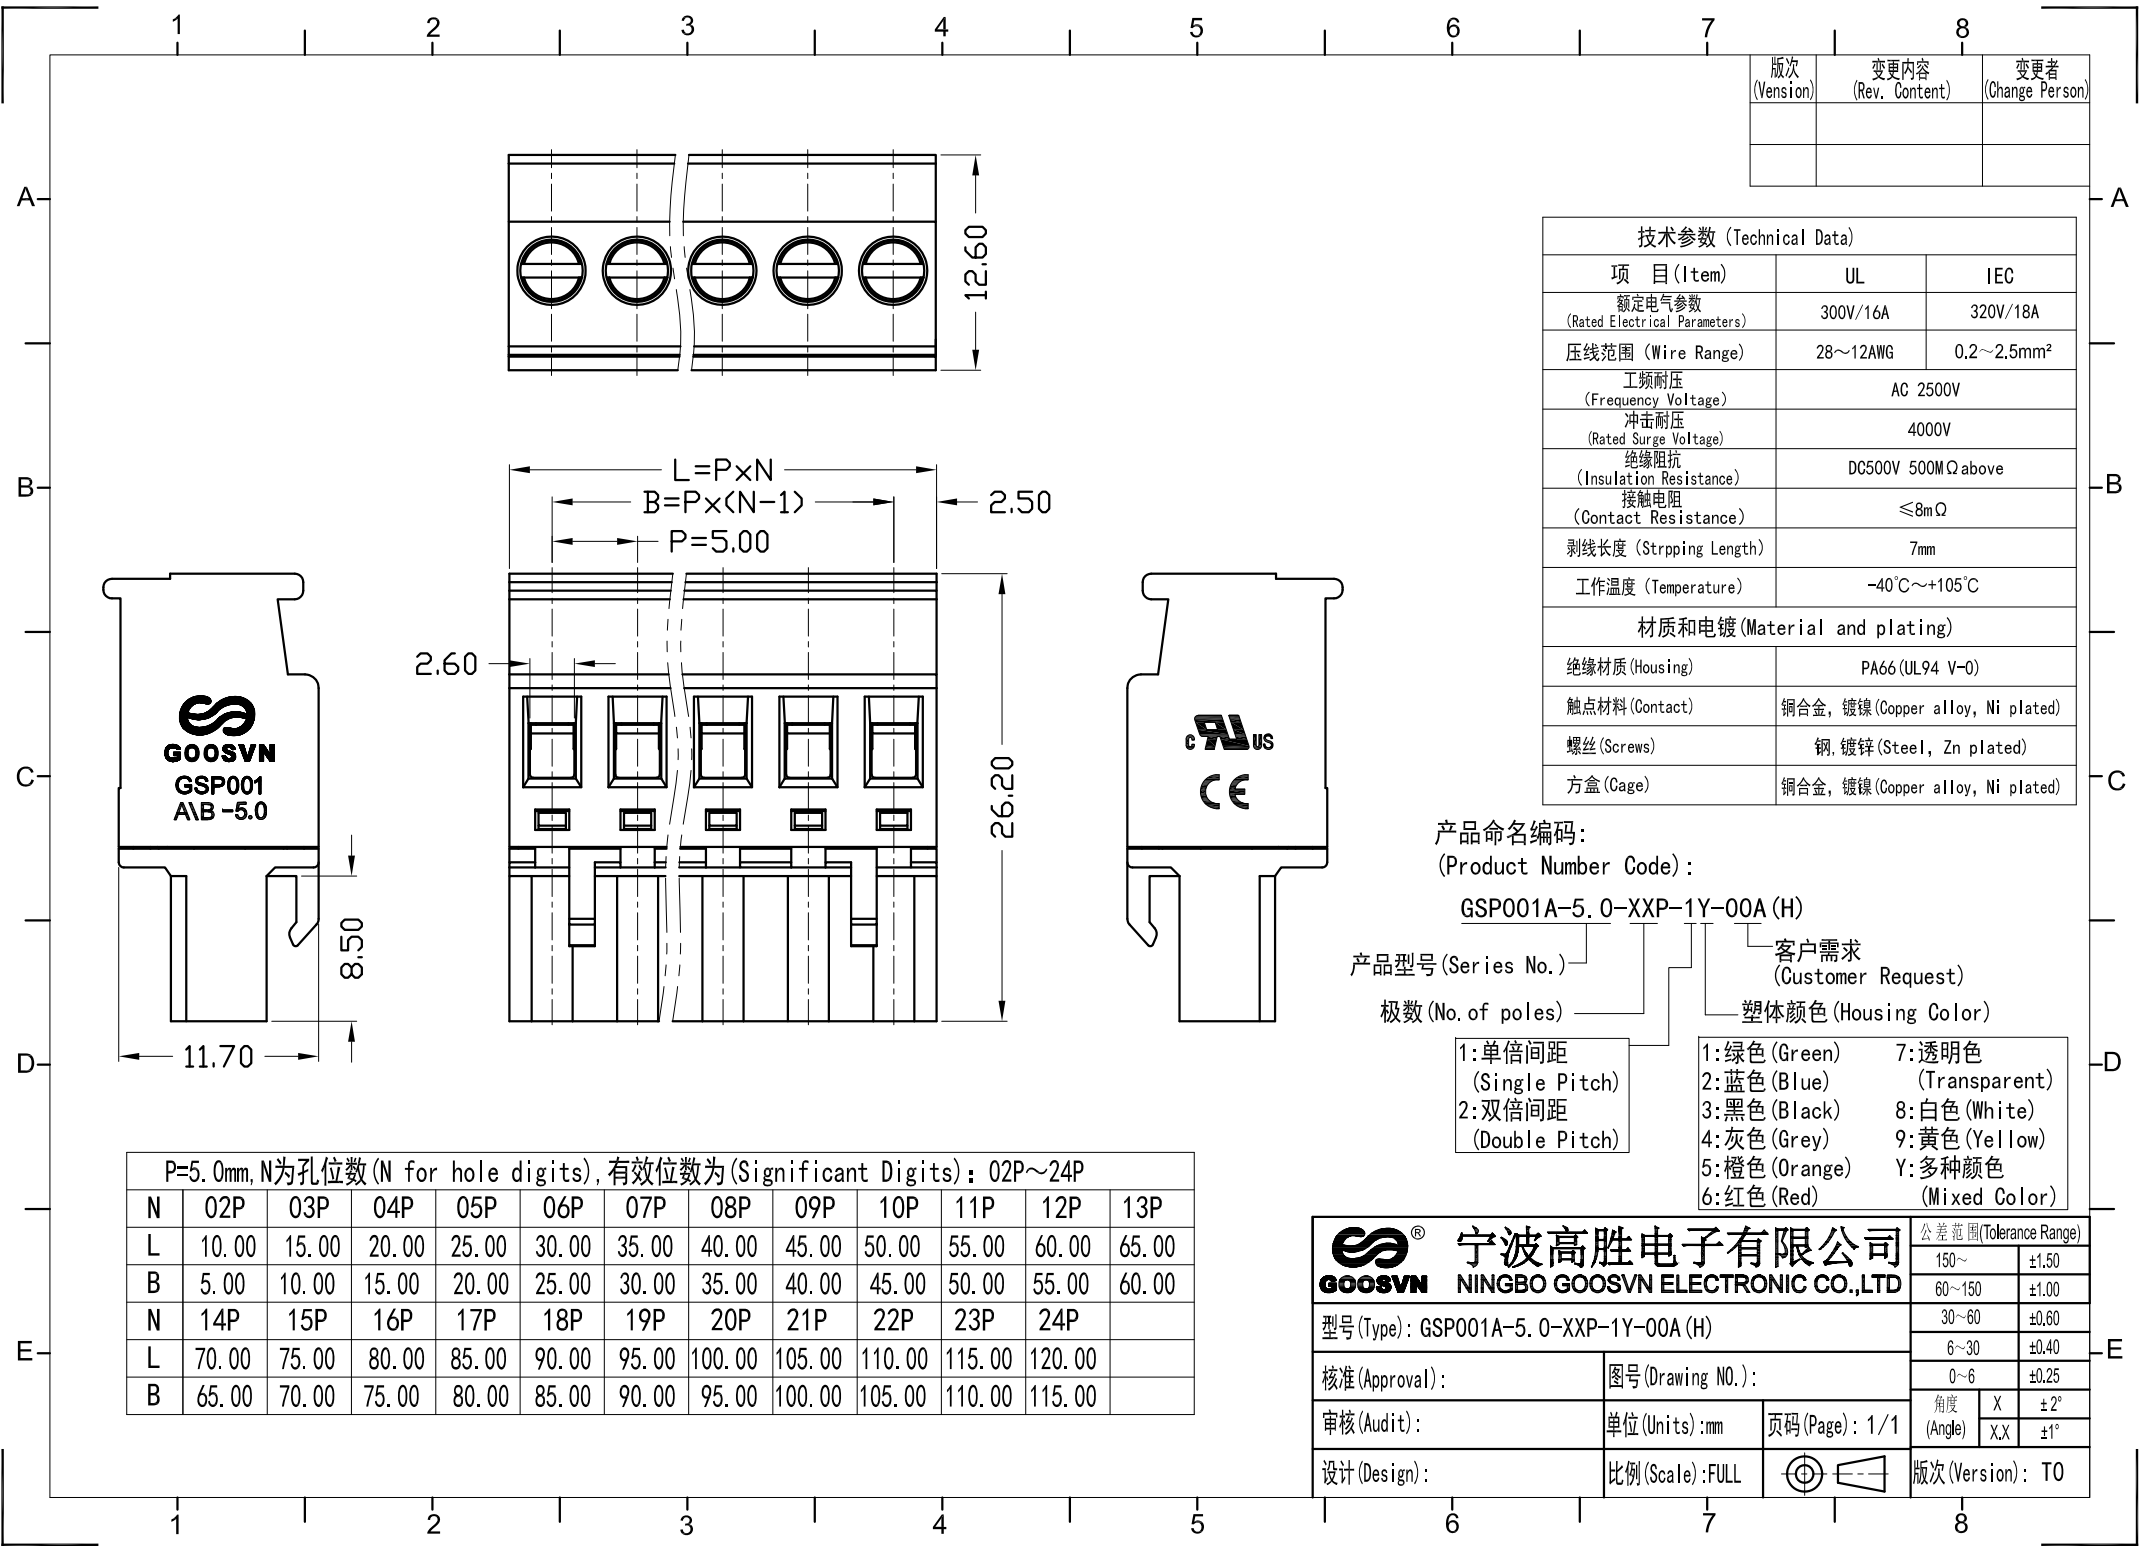

版次 (Version)	変更内容 (Rev. Content)	変更者 (Change Person)



技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/16A	320V/18A
压线范围 (Wire Range)	28~12AWG	0.2~2.5mm ²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤20mΩ	
剥线长度 (Strpping Length)	7mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀镍 (Copper alloy, Ni plated)	
螺丝 (Screws)	钢, 镀锌 (Steel, Zn plated)	
方盒 (Cage)	铜合金, 镀镍 (Copper alloy, Ni plated)	

产品命名编码:

(Product Number Code):

GSP001A-5. 08-XXP-1Y-00A (H)

产品型号 (Series No.)

客户需求

(Customer Request)


极数 (No. of poles)

—塑体颜色(Housing Color)

1:单倍间距
(Single Pitch)
2:双倍间距
(Double Pitch)

1: 绿色 (Green)	7: 透明色 (Transparent)
2: 蓝色 (Blue)	8: 白色 (White)
3: 黑色 (Black)	9: 黄色 (Yellow)
4: 灰色 (Grey)	Y: 多种颜色 (Mixed Color)
5: 橙色 (Orange)	
6: 红色 (Red)	

P=5.08mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02P~24P												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	

 宁波高胜电子有限公司 NINGBO GOOSVN ELECTRONIC CO.,LTD			公差范围(Tolerance Range) <table><tr><td>150~</td><td colspan="2">±1.50</td></tr><tr><td>60~150</td><td colspan="2">±1.00</td></tr><tr><td>30~60</td><td colspan="2">±0.60</td></tr><tr><td>6~30</td><td colspan="2">±0.40</td></tr><tr><td>0~6</td><td colspan="2">±0.25</td></tr></table>			150~	±1.50		60~150	±1.00		30~60	±0.60		6~30	±0.40		0~6	±0.25	
150~	±1.50																			
60~150	±1.00																			
30~60	±0.60																			
6~30	±0.40																			
0~6	±0.25																			
型号(Type): GSP001A-5. 08-XXP-1Y-00A (H)			角度(Angle)																	
核准(Approval):		图号(Drawing NO.):		X	±2°															
审核(Audit):		单位(Units):mm		X,X	±1°															
设计(Design):		比例(Scale):FULL		 版次 (Version): T0																